

# How to make IC-9000 work with Edimax 16 cameras viewer application

Thanks for purchasing Edimax IC-9000. We have a Edimax Viewer application which can monitor 16 cameras at the same time. This instruction will help you how to use the application.


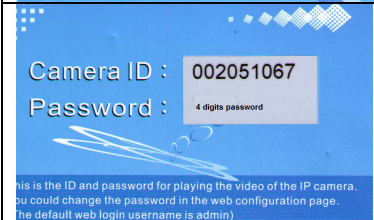
© 2011 Edimax Computer  
3350 Scott Blvd., Building #15  
Santa Clara, California 95054, USA  
Phone 408-496-1105 • Fax 408-980-1530  
[www.edimax.us](http://www.edimax.us)

# Introduction

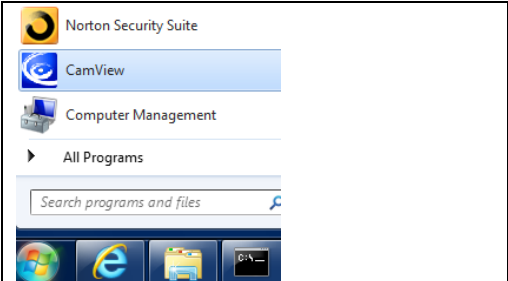

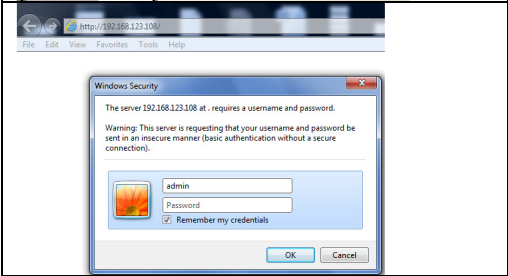
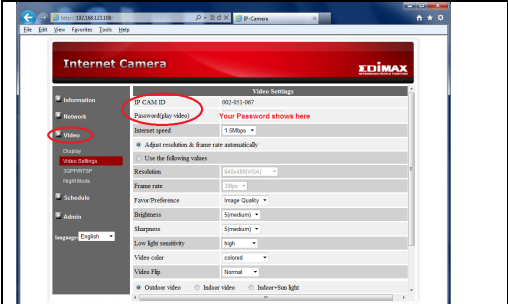
## Step 1. Install the IPCam Viewer application.

	<p>Insert the CD disk that came with IC-9000. In the AutoPlay window, click on “Run AutoRun.exe”</p>
	<p>Click “16 channel viewer”.</p>
	<p>Follow the instruction, click on Next to continue the installation.</p>
	<p>When you see this Window, it means the installation is completed. Click on Finish button to finish the procedure. If the check box ‘Launch IPCam Surveillance software’ is checked, the IP Camera surveillance software will start after you click Finish button.</p>
	<p>Open the IPCam Surveillance Software later: Click on Start &gt; All Programs &gt; Internet Camera. Click on IPCam Surveillance Software.</p>


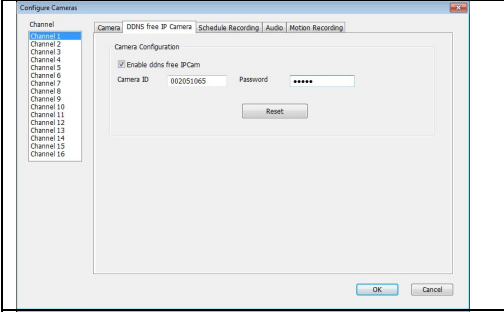
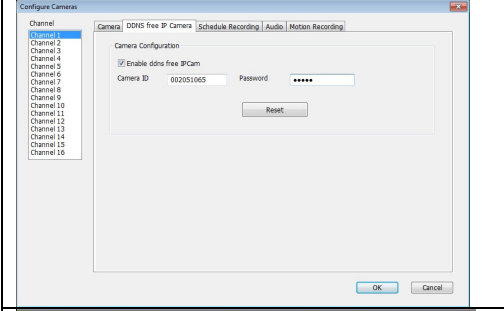

## Step 2. Locate the blue card in the package box

	<p>Front page of the blue card.</p>
	<p>Back page of the blue card. You need to have the Camera ID and the password.</p>

## If there is no blue card, below can help you find the Camera ID and the password.

	<p>If you do not know the IP address of IC-9000, please install the CamView application from CD disk of IC-9000. Open CamView application.</p>
	<p>Right click on the found Camera, click on "Web Configure". It will open your web browser and access the web page of IC-9000.</p>
	<p>The default username is admin. Leave the password field empty. Click OK to login.</p>
	<p>Go into Video, Click on Video Settings. You will see the IP Cam ID and your password. Please note the Cam ID is 9 digits without hyphen.</p>

### Step3. Configuration in the IP Cam Surveillance Software.

	<p>Click on Configure Cameras.</p>
	<p>Select the Channel number on the Left menu.</p>
	<p>Do not put any configuration in Camera tab. If you see any setting in the Camera tab, delete those settings.</p> <p>Go to DDNS Free IP Camera tab. Put a check on the box "Enable ddns free IPCam" Enter your Camera ID Enter your video password</p> <p>Click OK.</p>
	<p>The IC-9000 video would show up in the Edimax 16 camera viewer applications.</p> <p>Congratulations, the configuration is completed.</p>